


Write a program of Default arguments

```
class hello
{
    int x,y;
    hello()
    {
        x=0;
        y=0;
    }
    void getvalue()
    {
        System.out.println();
        System.out.println(x);
        System.out.println(y);
        System.out.println();
    }
    hello(int a)
    {
        x=a;
        y=0;
    }
}
class defaultarg
{
    public static void main(String[] args)
    {
        hello he=new hello();
        he.getvalue();
        hello he1=new hello(20);
        he1.getvalue();
    }
}
```

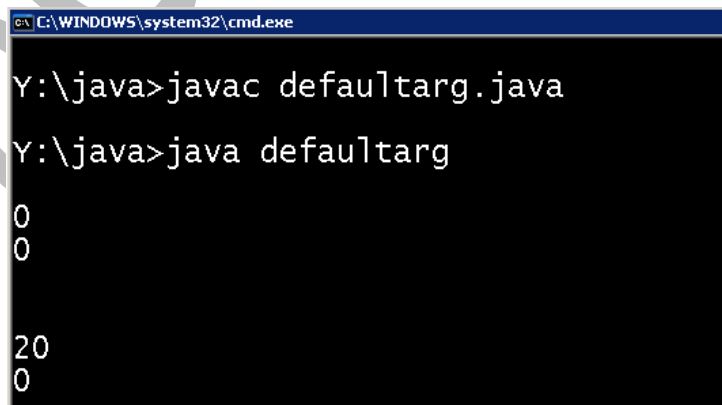

```
C:\WINDOWS\system32\cmd.exe
Y:\java>javac defaultarg.java
Y:\java>java defaultarg
0
0
20
0
```